




Air



FABRAA^F
fabrics with a conscience

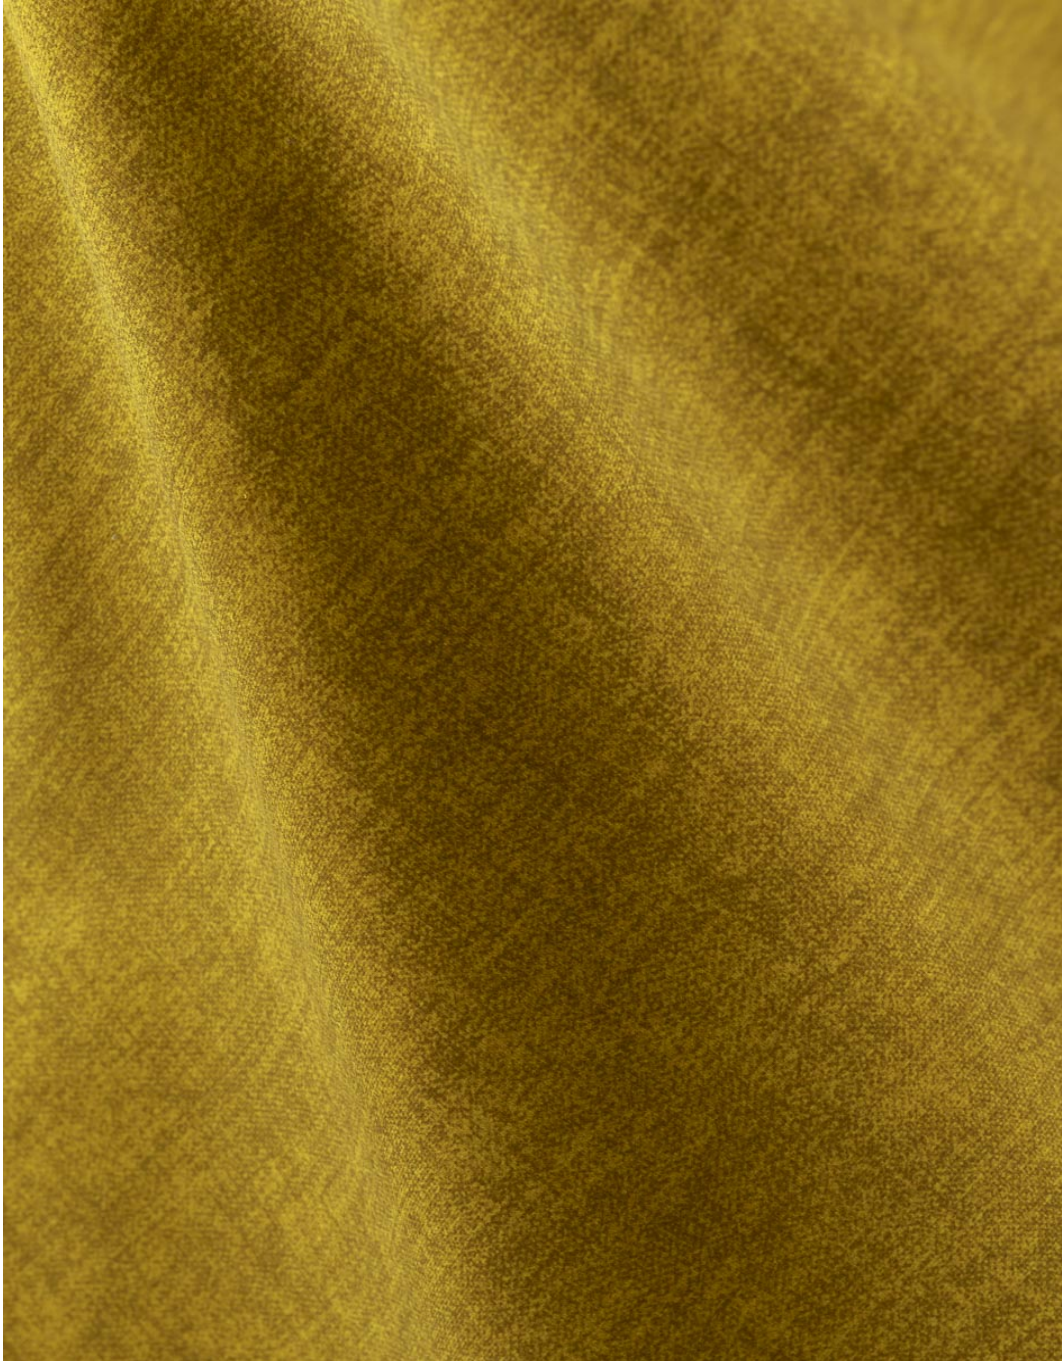

Air

This RPET textile is part of our www.wovenbottles.com collection. Air is the name of this luxurious piece-dyed upholstery fabric and it has an elegant printed 'slub texture'.

A heavy fleece backing creates an extra special thick handfeel, the total weight is +/- 510 grams per linear meter. The yarn of this fabric is made from 78% recycled RPET bottles and 22% virgin polyester.

Air is strong, durable and easy to clean with a damp cloth.

Perfectly suitable for both fitted and loose-fitting upholstery and available from stock in a wide range of modern, deep and trendy colours.

Washable at 30 degrees Celsius (machine).

- Please note that no fluor-carbon treatment has been used for this quality, due to the production and dyeing method it is automatically damp & dirt prevented, stain resistant and easy to clean & maintain.

- We recommend to wash the cover inside out and immediately place the cover back to the piece of furniture slightly damp after washing.

- Please note that during washing the damp- and dirt prevented treatment will disappear faster.

- Dirt and damp prevention treatment applied.

Fabrra Upholstery fabrics with a conscience. We make sustainable choices easy by offering a wide range of high-quality, affordable upholstery fabrics with consideration for the conditions throughout the supply chain.

Composition

/ faceside 78%RPET 22%PES

/ backside 100%RPET

/ knitted velvet

Suitable for

sofa's, beds, chairs with fitted and loose fitting upholstery



anthracite 67



ashgrey 40



blue 45



cacao 83



clay 84



copper 126



denim 153



ecru 102



forest 162



gold 132



liver 10



magnolia 160


Please note: colours may vary according to your screen settings.



ocre 23



pearl 106



steel 149



thyme 206



wenge 192



winered 39



zinc 167

Please note: colours may vary according to your screen settings.

Air - Article passport

A luxurious piece dyed article with a printed 'slub texture'.

Available from stock in a wide range of contemporary and commercial colours.

Product characteristics

Productgroup	knitted velvet
Applications	sofa's, beds, chairs with fitted and loose fitting upholstery
Composition faceside	78%RPET 22%PES
Composition backside	100%RPET
Bonding	fleece
Statistic code	60053900
Dyeing method	piece dyed
Available colours	19
Packaging	transparent plastic

Durability specifications

Test	Test specification	Executed by laboratory:	Unit	Testresult		Norm RAL GZ 430/4:2019-01		Norm DIN EN 14 465:2006-09
				Dry	Wet	DGM	DGM+	
Abrasion resistance - yarn breakage	DIN EN ISO 12947-1:2007-04, DIN EN ISO 12947-2:2017-03	CTL	cycles	95.000		min. 20.000	min. 40.000	A
Pilling	DIN EN ISO 12945-2:2000-11. 2000 cycles	CTL	grade	4-5		min. 3-4	min. 4	A
Colour fastness to light	DIN EN ISO 105-BO2:2014-11. Process 3, exposure level 5							
	light colours	CTL	grade	4		min. 4	min.5	C
	middle colours	CTL	grade	4-5		min. 4	min.5	B-C
Colour fastness to rubbing	DIN EN ISO 105-X12:2016-11							
	light colours	CTL	grade	5	5	dry: 4, wet: 3	dry: > 4, wet: 3-4	A/A
	middle colours	CTL	grade	5	5	dry: 4, wet: 3	dry: > 4, wet: 3-4	A/A
dark colours	CTL	grade	4-5	4-5	dry: 4, wet: 3	dry: > 4, wet: 3-4	A/A	
	Ignitability (cigarette test)	BS 5852 part 1 (1979) from The Furniture and Furnishing (Fire) (Safety) regulations: 1988 No. 1324. Schedule 4 part 1 Ignition source 0: cigarette	CTL	passed				

Processing specifications

Minimum workable width in centimeters	± 138							
Roll length in meters	± 40							
Material weight in grams per linear meter	± 510							
Test	Test specification	Executed by laboratory:	Unit	Testresult		Norm RAL GZ 430/4:2019-01		Norm DIN EN 14 465:2006-09
				Warp	Weft	DGM	DGM+	
Tensile strength	DIN EN ISO 13934-1:2013-08	CTL	Newton	863	543	min. 350	min. 400	A/B
Tear growth resistance	DIN EN ISO 13937-3:2000-06	CTL	Newton	39,2	30,7	min. 25	min. 30	B/B
Resistance to seam slippage	DIN EN ISO 13936-2:2004-07. Load 180 N	CTL	mm	1,8	1,6	max. 5	max. 4	A/A
Delamination	DIN 53530:1981-02	CTL	Newton	27,4	17,7	n/a	n/a	n/a
Chemical substances	REACH	Centexbel	passed					
	Oeko-Tex, product class II	Centexbel	certified					

Cleaning specifications

Test	Test specification	Executed by laboratory:	Unit	Testresult		Norm RAL GZ 430/4:2019-01		Norm DIN EN 14 465:2006-09
				Warp	Weft	DGM	DGM+	
Dimensional change for washing 30 degrees celcius / air drying	DIN EN ISO 5077:2008-04, DIN EN ISO 6330:2013-02, DIN EN ISO 3759:2011-08	CTL	%	0,0	-0,2	n/a	n/a	A/A



- We recommend to wash the cover inside out and immediately place the cover back to the piece of furniture slightly damp after washing.
 - Please note that during washing the damp- and dirt prevented treatment will disappear faster.
 - Dirt and damp prevention treatment applied.



Textafoam b.v.
 La Défense 11 | 5026 SC Tilburg
 P.O. Box 12 | 5050 AA Goirle
 The Netherlands

T +31(0)13 534 5934
 F +31(0)13 534 7586
 E info@textafoam.nl
 www.textafoam.nl