




Cloud



OEKO-TEX®
CONFIDENCE IN TEXTILES

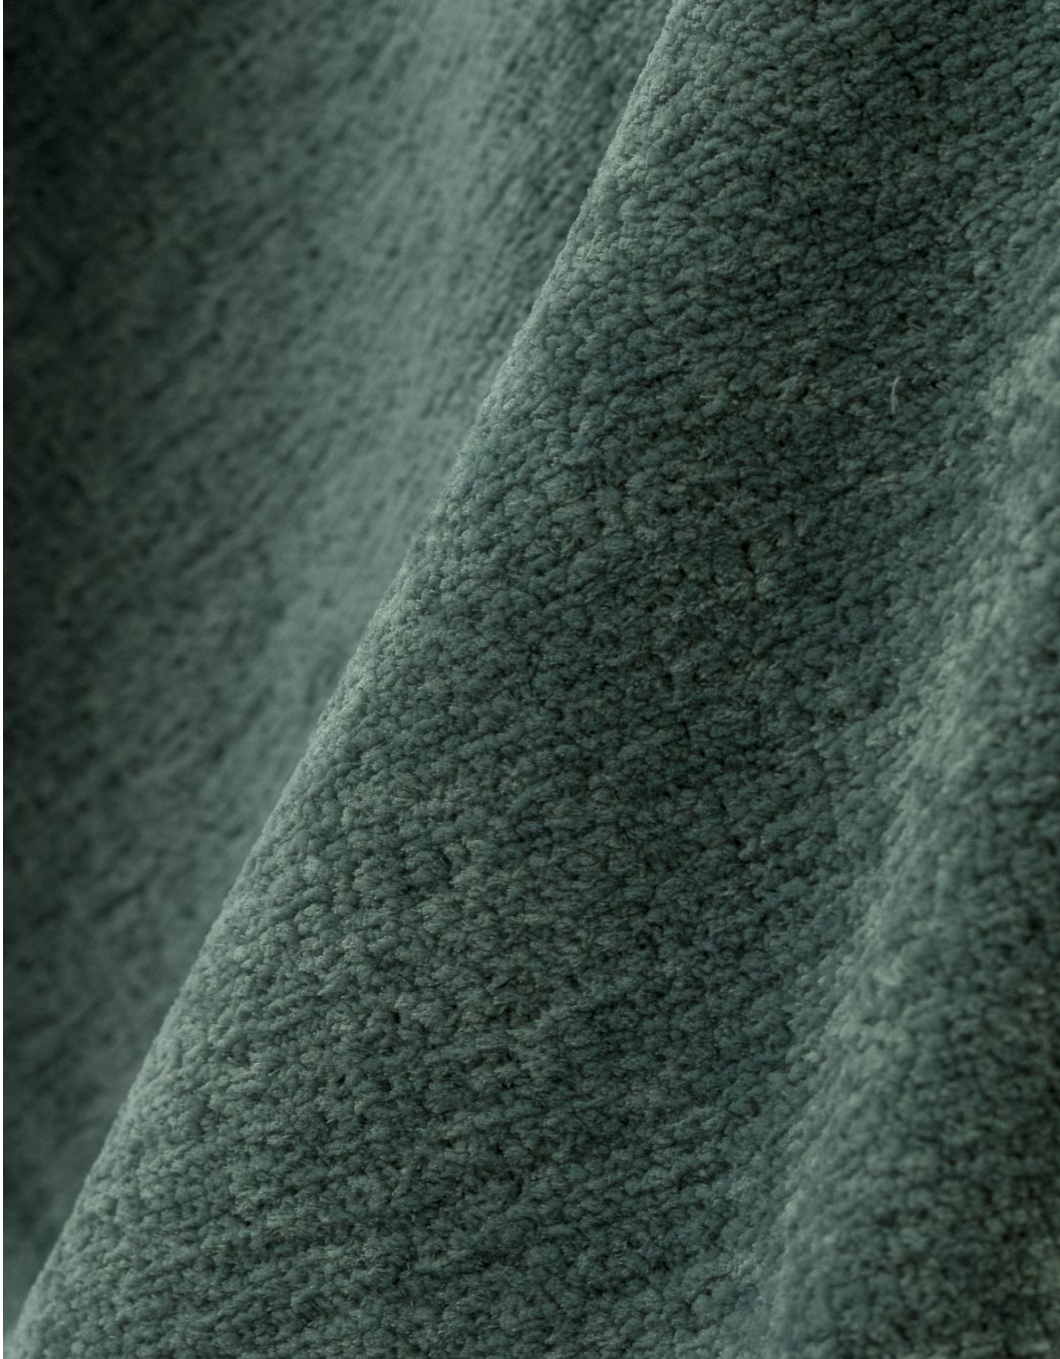

FABRAA®
fabrics with a conscience



Cloud

This chenille jacquard textile has an enormous comfortable and chunky handfeel, the warp exists from virgin polyester and the weft is from recycled cotton and recycled polyester (RPET).

This luxurious and sustainable upholstery textile is suitable for all types of upholstery, such as loose covers and tight fitted furniture.

A heavy fabric of almost 1 kg per linear meter, it will definitely lift up the sofa, chair and bed.

Due to the chenille yarns, shading and / or sitting mirror are unavoidable, brushing against the pile with a soft brush will have a positive effect on this seat depression, kindly note that it will never disappear completely, it is a property of these kind of (heavy chenille) upholstery fabrics.

This yarn dyed quality is available from stock in a wide, deep and trendy colour line.

- We recommend to wash the cover inside out and immediately place the cover back to the piece of furniture slightly damp after washing.

Fabreea Upholstery fabrics with a conscience. We make sustainable choices easy by offering a wide range of high-quality, affordable upholstery fabrics with consideration for the conditions throughout the supply chain.

Composition

/ faceside 64%RPET 29%PES 7%RCO
/ backside n/a
/ chenille jacquard

Suitable for

sofa's, beds, chairs with fitted and loose fitting upholstery



azure 144



beige 05



brick 128



clay 84



cognac 28



gold 132



graphite 66



hunter 156



indigo 90



ivory 101



magnolia 160



shitake 124

Please note: colours may vary according to your screen settings.



stone 181



wood 108

Please note: colours may vary according to your screen settings.


Cloud - Article passport

Available from stock in a wide range of contemporary and commercial colours.

Product characteristics

Productgroup	chenille jacquard	
Applications	sofa's, beds, chairs with fitted and loose fitting upholstery	
Composition faceside	64%RPET 29%PES 7%RCO	
Composition backside	n/a	
Coating	transparent	
Statistic code	58013600	
Dyeing method	yarn dyed	
Available colours	14	
Packaging	transparent plastic	






Durability specifications

Test	Test specification	Executed by laboratory:	Unit	Testresult		Norm RAL GZ 430/4:2019-01		Norm DIN EN 14 465:2006-09
				Dry	Wet	DGM	DGM+	
Abrasion resistance - yarn breakage	DIN EN ISO 12947-1:2007-04, DIN EN ISO 12947-2:2017-03	CTL	cycles	100.000		min. 8.000	min. 16.000	A
Pilling	DIN EN ISO 12945-2:2000-11. 2000 cycles	CTL	grade	5		min. 3-4	min. 4	A
Colour fastness to light	DIN EN ISO 105-BO2:2014-11. Process 3, exposure level 5							
	light colours	CTL	grade	5		min. 4	min.5	A
	middle colours	CTL	grade	5		min. 4	min.5	A
	dark colours	CTL	grade	5		min. 4	min.5	A
Colour fastness to rubbing	DIN EN ISO 105-X12:2016-11							
	light colours	CTL	grade	5	5	dry: 4, wet: 3	dry: > 4, wet: 3-4	A/A
	middle colours	CTL	grade	5	5	dry: 4, wet: 3	dry: > 4, wet: 3-4	A/A
	dark colours	CTL	grade	4-5	4-5	dry: 4, wet: 3	dry: > 4, wet: 3-4	A/A
Ignitability (cigarette test)	 BS 5852 part 1 (1979) from The Furniture and Furnishing (Fire) (Safety) regulations: 1988 No. 1324. Schedule 4 part 1 Ignition source 0: cigarette	CTL		passed				

Processing specifications

Minimum workable width in centimeters	± 138							
Roll length in meters	± 25							
Material weight in grams per linear meter	± 982							
Test	Test specification	Executed by laboratory:	Unit	Testresult		Norm RAL GZ 430/4:2019-01		Norm DIN EN 14 465:2006-09
				Warp	Weft	DGM	DGM+	
Tensile strength	DIN EN ISO 13934-1:2013-08	CTL	Newton	1.973	475	min. 350	min. 400	A/B
Tear growth resistance	DIN EN ISO 13937-3:2000-06	CTL	Newton	196,1	51,1	min. 25	min. 30	A/A
Resistance to seam slippage	DIN EN ISO 13936-2:2004-07. Load 180 N	CTL	mm	5,4	1,4	max. 5	max. 4	B/A
Delamination	DIN 53530:1981-02	CTL	Newton	n/a	n/a	n/a	n/a	n/a
Chemical substances	REACH	Centexbel		passed				
	Oeko-Tex, product class II	Centexbel		certified				

Cleaning specifications

Test	Test specification	Executed by laboratory:	Unit	Testresult		Norm RAL GZ 430/4:2019-01		Norm DIN EN 14 465:2006-09
				Warp	Weft	DGM	DGM+	
Dimensional change for washing 30 degrees celcius / air drying	DIN EN ISO 5077:2008-04, DIN EN ISO 6330:2013-02, DIN EN ISO 3759:2011-08	CTL	%	-0,8	-3,2	n/a	n/a	A/B
    		- We recommend to wash the cover inside out and immediately place the cover back to the piece of furniture slightly damp after washing.						

OEKO-TEX®
CONFIDENCE IN TEXTILES



FABRAA®
fabrics with a conscience

Textaafoam b.v.

La Défense 11 | 5026 SC Tilburg
P.O. Box 12 | 5050 AA Goirle
The Netherlands

T +31(0)13 534 5934
F +31(0)13 534 7586
E info@fabraa.com
www.fabraa.com