




Earth



OEKO-TEX®  
CONFIDENCE IN TEXTILES

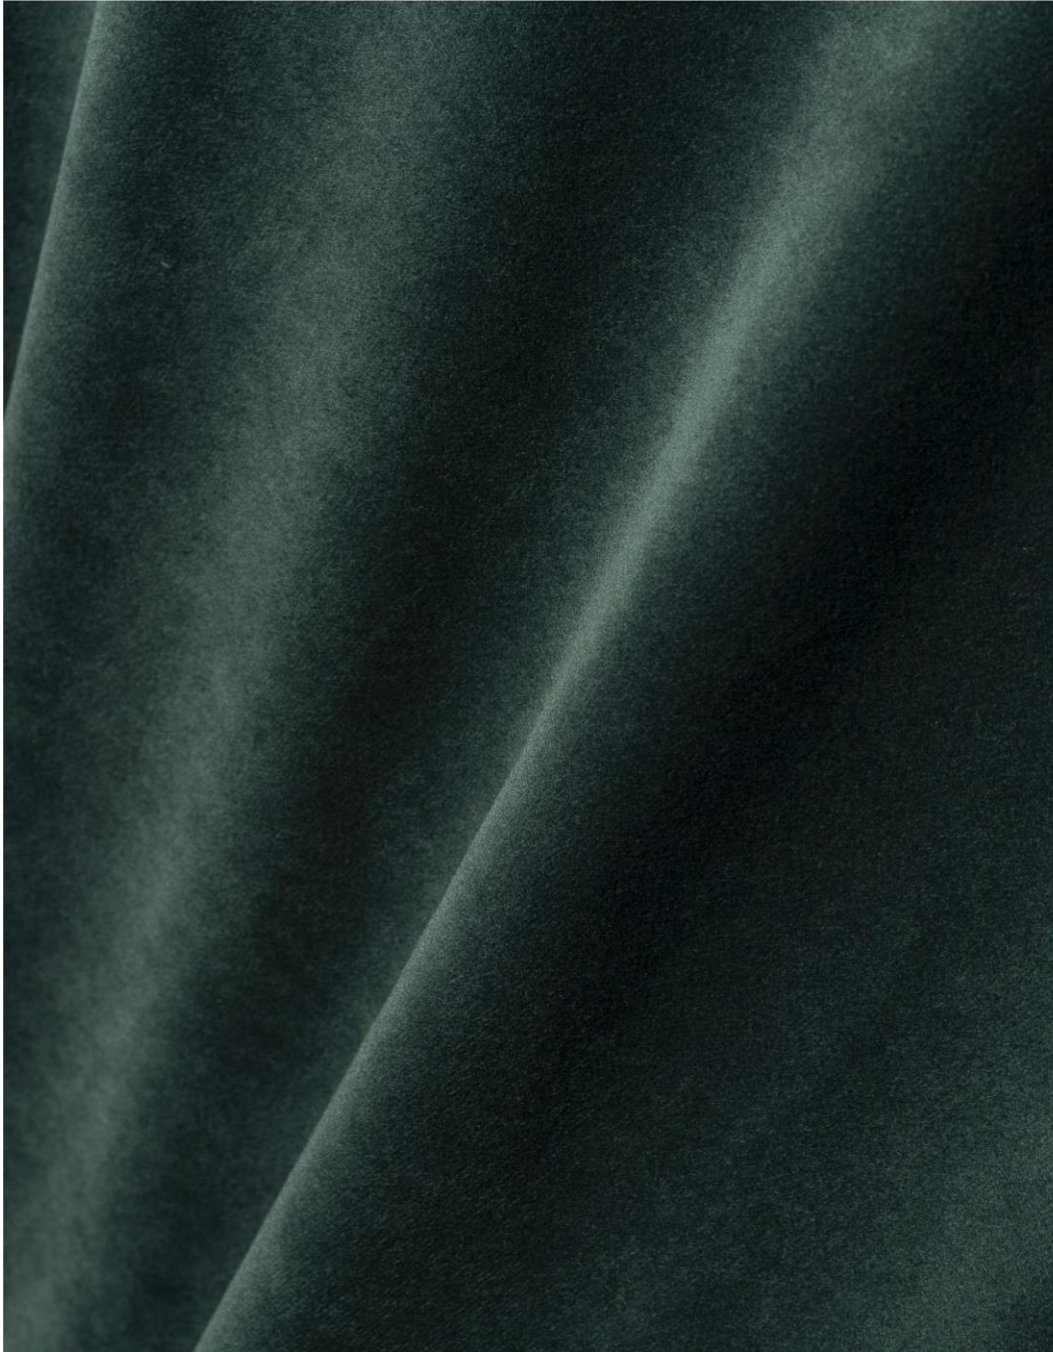

**FABRAA**<sup>®</sup>  
fabrics with a conscience



# Earth

This piece dyed knitted velvet is strong and machine-washable at 30 degrees Celsius\*. A sustainable textile which is part of our [www.wovenbottles.com](http://www.wovenbottles.com) collection.

The pile provides a comfortable softness and creates a light shiny and elegant look.

A velvet which is made in a sustainable way from 100% RPET bottles. This luxurious upholstery fabric is durable and very easy to clean and maintain.

Earth is suitable for all types of upholstery and we supply this velvet in a wide range of trendy, modern and commercial colours.

- Please note that no fluor-carbon treatment has been used for this quality, due to the production and dyeing method it is automatically damp & dirt prevented, stain resistant and easy to clean & maintain.

- We recommend to wash the cover inside out and immediately place the cover back to the piece of furniture, slightly damp, after washing.

*Fabraa Upholstery fabrics with a conscience. We make sustainable choices easy by offering a wide range of high-quality, affordable upholstery fabrics with consideration for the conditions throughout the supply chain.*

## Composition

/ faceside 100%RPET  
/ backside n/a  
/ knitted velvet

## Suitable for

sofa's, beds, chairs with fitted and loose fitting upholstery



army 14



beige 05



burgundy 34



cabernet 205



copper 126



forest 162



graphite 66



indigo 90



liver 10



magnolia 160



mustard 06



onyx 169


Please note: colours may vary according to your screen settings.



plumb 168



shitake 124



slate 87



teal 198



wood 108

Please note: colours may vary according to your screen settings.

## Earth - Article passport


Knitted velvet made from 100% RPET bottles with a light shiny and elegant look.

Available from stock in a wide range of contemporary and commercial colours.

### Product characteristics

Productgroup	knitted velvet
Applications	sofa's, beds, chairs with fitted and loose fitting upholstery
Composition faceside	100%RPET
Composition backside	n/a
Bonding / Coating	n/a
Statistic code	60053900
Dyeing method	piece dyed
Available colours	17
Packaging	boxes






### Durability specifications

Test	Test specification	Executed by laboratory:	Unit	Testresult		Norm RAL GZ 430/4:2019-01		Norm DIN EN 14 465:2006-09
				Dry	Wet	DGM	DGM+	
Abrasion resistance - yarn breakage	DIN EN ISO 12947-1:2007-04, DIN EN ISO 12947-2:2017-03	CTL	cycles	>100.000		min. 20.000	min. 40.000	A
Pilling	DIN EN ISO 12945-2:2000-11. 2000 cycles	CTL	grade	4-5		min. 3-4	min. 4	A
Colour fastness to light	DIN EN ISO 105-B02:2014-11. Process 3, exposure level 5							
	light colours	CTL	grade	5		min. 4	min.5	B
	middle colours	CTL	grade	5		min. 4	min.5	B
Colour fastness to rubbing	DIN EN ISO 105-X12:2016-11							
	light colours	CTL	grade	5	5	dry: 4, wet: 3	dry: > 4, wet: 3-4	A/A
	middle colours	CTL	grade	4-5	5	dry: 4, wet: 3	dry: > 4, wet: 3-4	A/A
Colour fastness to rubbing	dark colours	CTL	grade	4	4	dry: 4, wet: 3	dry: > 4, wet: 3-4	B/B
	Ignitability (cigarette test)	 BS 5852 part 1 (1979) from The Furniture and Furnishing (Fire) (Safety) regulations: 1988 No. 1324. Schedule 4 part 1 Ignition source 0: cigarette	CTL	passed				

### Processing specifications

Minimum workable width in centimeters	± 138							
Roll length in meters	± 35							
Material weight in grams per linear meter	± 620							
Test	Test specification	Executed by laboratory:	Unit	Testresult		Norm RAL GZ 430/4:2019-01		Norm DIN EN 14 465:2006-09
				Warp	Weft	DGM	DGM+	
Tensile strength	DIN EN ISO 13934-1:2013-08	CTL	Newton	631	982	min. 350	min. 400	A/A
Tear growth resistance	DIN EN ISO 13937-3:2000-06	CTL	Newton	46,7	60,7	min. 25	min. 30	A/A
Resistance to seam slippage	DIN EN ISO 13936-2:2004-07. Load 180 N	CTL	mm	2,1	2,0	max. 5	max. 4	A/A
Delamination	DIN 53530:1981-02	CTL	Newton	n/a	n/a	n/a	n/a	n/a
Chemical substances	REACH	Centexbel	passed					
	Oeko-Tex, product class II	Centexbel	certified					

### Cleaning specifications

Test	Test specification	Executed by laboratory:	Unit	Testresult		Norm RAL GZ 430/4:2019-01		Norm DIN EN 14 465:2006-09
				Warp	Weft	DGM	DGM+	
Dimensional change for washing 30 degrees celcius / air drying	DIN EN ISO 5077:2008-04, DIN EN ISO 6330:2013-02, DIN EN ISO 3759:2011-08	CTL	%	0,0	0,0	n/a	n/a	A/A
     <p>- We recommend to wash the cover inside out and immediately place the cover back to the piece of furniture, slightly damp, after washing.</p>								

OEKO-TEX®  
COMPROOFED BY TESTES



**FABRAA®**  
fabrics with a conscience

Textafoam b.v.  
La Défense 11 | 5026 SC Tilburg  
P.O. Box 12 | 5050 AA Goirle  
The Netherlands

T +31(0)13 534 5934  
F +31(0)13 534 7586  
E info@fabraa.com  
www.fabraa.com